



Cable entry plates for non-terminated cables




- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)



2

Double membrane



The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogen and silicone free


Wall thickness: from 1.5 to 2.5 mm

Related products

Hydraulic punch driver HY360 and related punches

GREY					
Model	Code	Cable nr.	Dimensions [mm]		Pcs
		- Ø cables [mm]	Cut-out	Plate	/pack
DES-PM 24 12G	1732052412	12 - max. 15			
DES-PM 24 14G	1732052414	14 - max. 12.1			
DES-PM 24 17G	1732052417	5 - max. 10.5 12 - max. 12.6			
DES-PM 24 18G	1732052418	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM 24 20G	1732052420	13 - max. 6.5 7 - max. 12.1	112 x 36 max. +0.5	144 x 46	10
DES-PM 24 26G	1732052426	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - cavo ASI			
DES-PM 24 42G	1732052442	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM 24 48G	1732052448	48 - max. 6.5			
DES-PM 24 50G	1732052450	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			

Dimensions [mm]

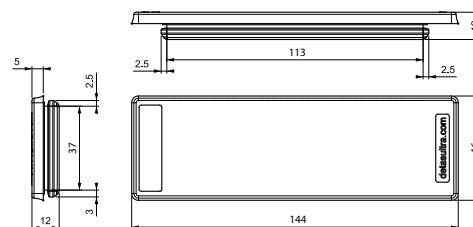



BLACK					
Model	Code	Cable nr.	Dimensions [mm]		Pcs /pack
			Cut-out	Plate	
DES-PM 24 12B	1732053413	12 - max. 15			
DES-PM 24 14B	1732053415	14 - max. 12.1			
DES-PM 24 17B	1732053418	5 - max. 10.5 12 - max. 12.6			
DES-PM 24 18B	1732053419	4 - max. 6.5 5 - max. 10.5 5 - max. 12.6 4 - max. 16.1			
DES-PM 24 20B	1732053421	13 - max. 6.5 7 - max. 12.1	112 x 36 max. +0.5	144 x 46	10
DES-PM 24 26B	1732053427	16 - max. 6.5 4 - max. 12.1 4 - max. 16.1 2 - cavo ASI			
DES-PM 24 42B	1732053443	1 - max. 4.7 12 - max. 5 17 - max. 6.4 12 - max. 7.2			
DES-PM 24 48B	1732053449	48 - max. 6.5			
DES-PM 24 50B	1732053451	33 - max. 5.3 9 - max. 6.4 8 - max. 8.3			



Cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)



The DES-PM 24 is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogen and silicone free

Wall thickness: from 1.5 to 2.5 mm


Related products

Hydraulic punch driver HY360 and related punches

Double membrane



Dimensions [mm]

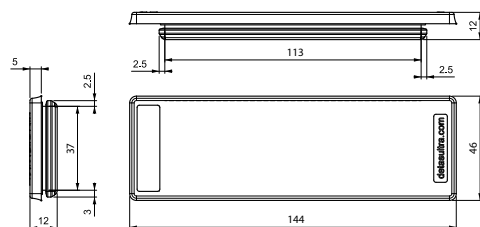



Cable entry plates for non-terminated cables



- ▶ For high number of cables in a limited space
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)



2

Double membrane



The DES-PM S is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0


Temperature: -40°C... +105°C (static)

Features: halogen and silicone free

Wall thickness: from 1.5 to 2.5 mm

GREY					
Model	Code	Cable nr.	Dimensions [mm]		Pcs
		- Ø cables [mm]	Cut-out A1xA2	Plate L1xL2	/pack
DES-PM S 46 7G	1732074607	2 - max. 6.5 5 - max. 8.3	46 x 18 max. +0.5	64 x 28	10
DES-PM S 46 9G	1732074609	8 - max. 6.5 1 - max. 12.1			
DES-PM S 86 11G	1732078611	2 - max. 6.5 9 - max. 8.35	85 x 16 max. +0.5	103 x 28	10
DES-PM S 86 17G	1732078617	16 - max. 6.5 1 - max. 12.1			
DES-PM S 112 21G	1732071221	16 - max. 6.5 4 - max. 8.3 1 - max. 12.1	112 x 18 max. +0.5	130 x 28	10

Dimensions [mm]

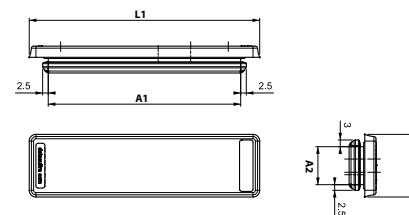



BLACK					
Model	Code	Cable nr.	Dimensions [mm]		Pcs
		- Ø cables [mm]	Cut-out A1xA2	Plate L1xL2	/pack
DES-PM-S 46 7B	1732074608	2 - max. 6.5 5 - max. 8.3	46 x 18 max. +0.5	64 x 28	10
DES-PM-S 46 9B	1732074610	8 - max. 6.5 1 - max. 12.1			
DES-PM-S 86 11B	1732078612	2 - max. 6.5 9 - max. 8.35	85 x 16 max. +0.5	103 x 28	10
DES-PM-S 86 17B	1732078618	16 - max. 6.5 1 - max. 12.1			
DES-PM-S 112 21B	1732071222	16 - max. 6.5 4 - max. 8.3 1 - max. 12.1	112 x 18 max. +0.5	130 x 28	10



Cable entry plates for non-terminated cables

- ▶ For high number of cables in a limited space
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)




2

The DES-PM S is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Double membrane



Technical data

Material: TPE


Flammability: self-extinguishing
acc. to UL94-V0

Temperature: -40°C... +105°C
(static)

Features: halogen and silicone free

Wall thickness: from 1.5 to 2.5 mm

Dimensions [mm]

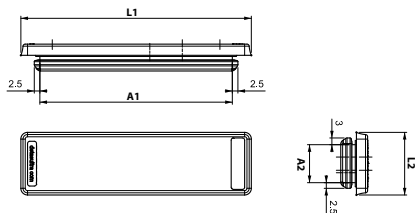



Round cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized



The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)


Features: halogen and silicone free

Type 1: wall thickness from 1.5 to 2.5 mm

Type 2: wall thickness from 2.8 to 4 mm

Related products

Hydraulic punch driver HY360 and related punches





Double membrane



Type 1 Type 2

GREY					
Model	Code	Cable nr.	Dimensions [mm]		Pcs
		- Ø cables [mm]	Ø Cut-out	Ø Plate	/pack
DES-PM M 25 4G	type 1: 1732062504	4 - max. 8	min.: 25 max.: 26 recomm.: 25.5	34	10
DES-PM M 25 6G	type 1: 1732062506	4 - max. 5.2 2 - max. 9.4			
DES-PM M 32 10G	type 1: 1732063210 tipo 2: 1732263210	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 recomm.: 32.5	40	10
DES-PM M 50 9G	type 1: 1732065009	5 - max. 7 4 - max. 18.3			
DES-PM M 50 11G	type 1: 1732065011	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM M 50 12G	type 1: 1732065012 type 2: 1732265012	10 - max. 9 2 - max. 11.4			
DES-PM M 50 15G	type 1: 1732065015	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12	min.: 50 max.: 51 recomm.: 50.5	62	10
DES-PM M 50 17G	type 1: 1732065017	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM M 50 20G	type 1: 1732065020	16 - max. 6.5 4 - max. 9.7			


Dimensions [mm]





BLACK					
Model	Code	Cable nr.	Dimensions [mm]		Pcs
		- Ø cables [mm]	Ø Cut-out	Ø Plate	/pack
DES-PM M 25 4B	type 1: 1732063505	4 - max. 8	min.: 25 max.: 26 recomm.: 25.5	34	10
DES-PM M 25 6B	type 1: 1732063507	4 - max. 5.2 2 - max. 9.4			
DES-PM M 32 10B	type 1: 1732064211 type 2: 1732264211	6 - max. 5.2 2 - max. 6.4 2 - max. 9.4	min.: 32 max.: 33 recomm.: 32.5	40	10
DES-PM M 50 9B	type 1: 1732066010	5 - max. 7 4 - max. 18.3			
DES-PM M 50 11B	type 1: 1732066012	7 - max. 7 3 - max. 11.4 1 - max. 22			
DES-PM M 50 12B	type 1: 1732066013 type 2: 1732266013	10 - max. 9 2 - max. 11.4	min.: 50 max.: 51 recomm.: 50.5	62	10
DES-PM M 50 15B	type 1: 1732066016	2 - max. 6 4 - max. 7.2 4 - max. 9.7 5 - max. 12			
DES-PM M 50 17B	type 1: 1732066018	5 - max. 5.5 5 - max. 6.5 3 - max. 9.7 4 - max. 11.4			
DES-PM M 50 20B	type 1: 1732066021	16 - max. 6.5 4 - max. 9.7			

Dimensions [mm]



Round cable entry plates for non-terminated cables

- ▶ For high number of cables
- ▶ High retaining force thanks to the double membrane
- ▶ Cost efficient solution
- ▶ High IP grade (IP65-66)
- ▶ Metric sized



The round metric DES-PM M is an innovative alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)


Features: halogen and silicone free

Type 1: wall thickness from 1.5 to 2.5 mm

Type 2: wall thickness from 2.8 to 4 mm

Related products

Hydraulic punch driver HY360 and related punches

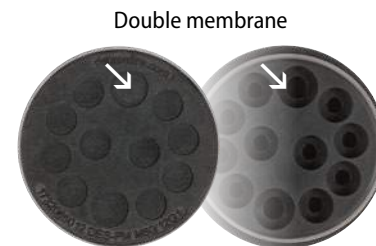

Type 1 Type 2

