

Attenuation of conductance HEBOCLIP-System

ATTENUATION OF CONDUCTANCE

The attenuation of conductance indicates by how many dB the existing interferences on the cable shield are attenuated by the shield contact.

A value of 20 dB results in an interference reduction of 90%, a value of 40 dB in a reduction of even 99%. The HEBOCLIP-system offers excellent attenuation of conductance for all assembly modes.

HHZ-2 EQUIPPED WITH HSK 6-8

The HEBOCLIP for tool-free assembly on 35 mm DIN rails.






HDZ EQUIPPED WITH HSK 6-8

The HEBOCLIP for direct assembly.



HSZ EQUIPPED WITH HSK 6-8

The HEBOCLIP for tool-free assembly on 10 x 3 mm busbars.

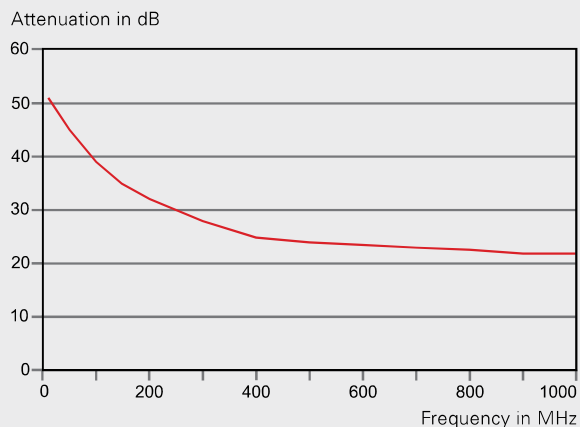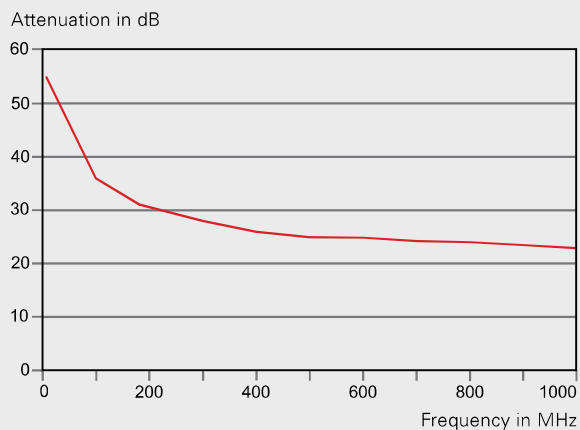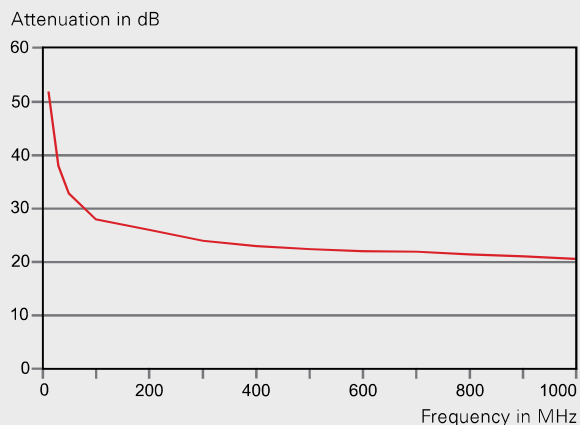

HSDZ EQUIPPED WITH HSK 6-8

The HEBOCLIP Duo for tool-free assembly on 10 x 3 mm busbars.

**HSKB 16 - 35 DIRECT ASSEMBLY**

The shield clamp for large diameters, directly mounted onto the mounting rail.

**HSKB-S 16 - 35 ON CLIP-FOOT**

The shield clamp for large diameters, mounted on clip-foot for tool-free assembly on 35 mm DIN rails.

**HSKB-F 35 - 65 WITH FLAT TAPE CONNECTOR**

The shield clamp for large diameters, for assembly with flexible flat tape connector.

