


ADMF

Accessories

Fire protection closure, inner | outer thread, fire barrier for fed-through cables, minimum of 30 minutes fire blocking (E30)

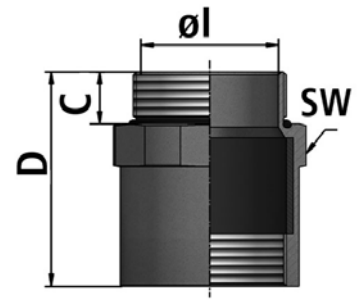

<b>Temperature:</b>	-40°C ... +600°C ^ +850°C
<b>Material:</b>	Body: nickel-plated brass   galvanized steel on request, O-ring: Perbunan, Inlay: carbon based



FLEXA No.	Threadtype	Ø l [mm]	C [mm]	D [mm]	WS [mm]	PU [pcs.]
5010.033.016	M16x1,5	13,0	12,0	38,5	22	25
5010.033.020	M20x1,5	16,5	12,0	41,0	27	25
5010.033.025	M25x1,5	21,0	13,0	49,0	32	10
5010.033.032	M32x1,5	27,5	14,0	52,5	41	10
5010.033.040	M40x1,5	35,0	17,0	63,5	46	2
5010.033.050	M50x1,5	45,0	17,0	70,0	60	2

UK - [www.buttkereit.co.uk](http://www.buttkereit.co.uk)

Recommendations for any areas of applications, products, or product combinations are issued to the best of FLEXA's knowledge and experience. The user is requested to check applicability of FLEXA products to specific applications and purposes prior to the use of the particular products. All documentation, illustrations, and charts published are subject to copyright and must not be copied, changed, used, or modified. Technical drawings, certificates, authorizations, and results by the FLEXA lab will be provided upon request. FLEXA will not be held liable for typographical or other errors and incorrect drawings. Technical modifications are subject to change without prior notice.