



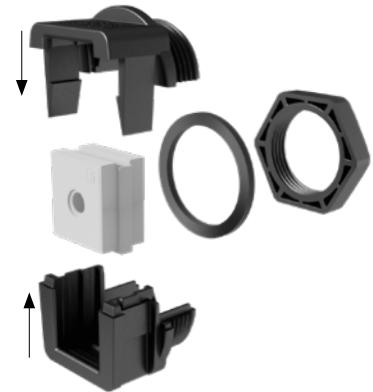

Splittable cable glands

NEW

- ▶ Metric sizes
- ▶ Without screws
- ▶ IP54
- ▶ Locknut included
- ▶ Available colors: grey and black

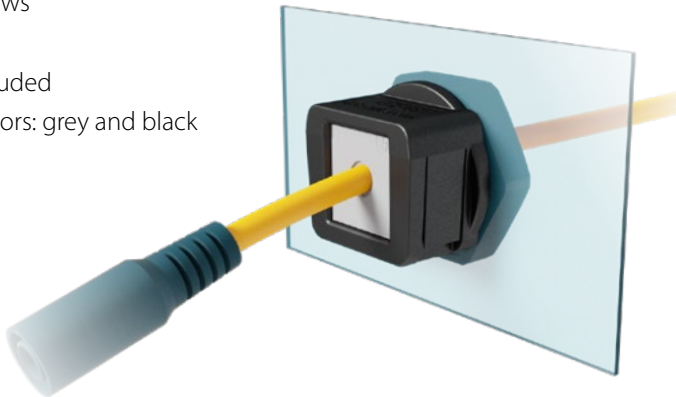

Model	Code	Cut-out Ø [mm]	Pcs /pack
OSF 16G	1731052316	16,5	10
OSF 20G	1731052320	20,5	
OSF 25G	1731052325	25,5	
OSF 32G	1731052332	32,5	
OSF 16B	1731052416	16,5	
OSF 20B	1731052420	20,5	
OSF 25B	1731052425	25,5	
OSF 32B	1731052432	32,5	

OSF is a splittable cable gland for metric sizes especially designed for cables with connectors.

The compact size and nice design are just a few of the countless advantages of the OSF Family.

OSF can be equipped with SPC grommets with single or multiple holes for both black and grey UL94V0 colors.

Technical data

Material: PC

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +130°C (static)



Features: halogens and silicones free

Related products

- Inserts SPC
- Inserts SPC 2x
- Inserts SPC 4x

Hydraulic punch driver HY360

Dimensions [mm]

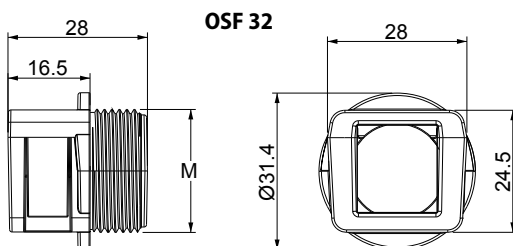



Splittable cable glands with 90° cable entry system

NEW

- ▶ 90° cable entry system
- ▶ Without screws
- ▶ IP54
- ▶ Locknut included
- ▶ Available colors: grey and white



Model	Code	Cut-out Ø [mm]	Pcs /pack
OSF90 16G	1731052916	16,5	10
OSF90 20G	1731052920	20,5	
OSF90 25G	1731052925	25,5	
OSF90 32G	1731052932	32,5	
OSF90 16B	1731052917	16,5	
OSF90 20B	1731052921	20,5	
OSF90 25B	1731052926	25,5	
OSF90 32B	1731052933	32,5	

OSF90 is a 90° splittable cable gland for metric sizes especially designed for cables with connectors. The 90° entry systems nice looking gives more "design" to the machine or cabinet.

The compact size and nice design are only few advantages of the OSF Family.

OSF 90 can be equipped with SPC grommets with single or multiple holes for both black and grey UL94V0 colors.

Technical data

Material: PC

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +130°C (static)

Features: halogens and silicones free



Related products

- Inserts SPC
- Inserts SPC 2x
- Inserts SPC 4x

Hydraulic punch driver HY360

1

Dimensions [mm]

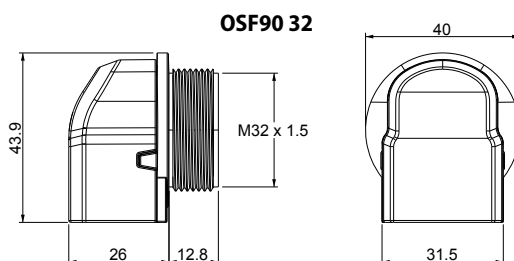

IP54

NEMA 12



UL94-V0



RoHS COMPLIANT



IK10






Inserts single, double, quadruple for OSF Family

NEW

- ▶ Openable cable inserts for diameters from 2 to 14 mm
- ▶ Blind version available
- ▶ Grey and black versions
- ▶ UL94-V0 for both colors

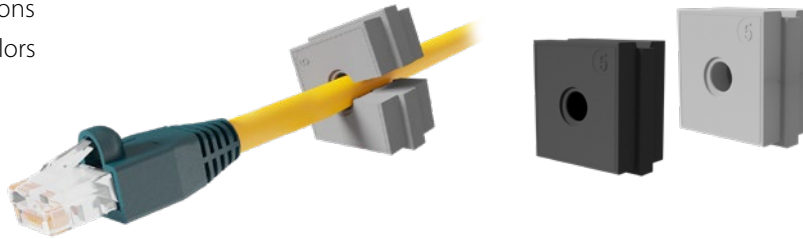

Model	Code	Ø Cable [mm]	Model	Code	Pcs /pack
		■			
SPC 0G	1731052500	"blind"	SPC 0B	1731052600	10
SPC 2G	1731052502	2	SPC 2B	1731052602	
SPC 3G	1731052503	3	SPC3B	1731052603	
SPC 4G	1731052504	4	SPC 4B	1731052604	
SPC 5G	1731052505	5	SPC 5B	1731052605	
SPC 6G	1731052506	6	SPC 6B	1731052606	
SPC 7G	1731052507	7	SPC 7B	1731052607	
SPC 8G	1731052508	8	SPC 8B	1731052608	
SPC 9G	1731052509	9	SPC 9B	1731052609	
SPC 10G	1731052510	10	SPC 10B	1731052610	
SPC 11G	1731052511	11	SPC 11B	1731052611	
SPC 12G	1731052512	12	SPC 12B	1731052612	
SPC 13G	1731052513	13	SPC 13B	1731052613	
SPC 14G	1731052514	14	SPC 14B	1731052614	
		■ ■			
SPC 2x2G	1731052522	2	SPC 2x2B	1731052622	10
SPC 2x3G	1731052523	3	SPC 2x3B	1731052623	
SPC 2x4G	1731052524	4	SPC 2x4B	1731052624	
SPC 2x5G	1731052525	5	SPC 2x5B	1731052625	
SPC 2x6G	1731052526	6	SPC 2x6B	1731052626	
SPC 2x7G	1731052527	7	SPC 2x7B	1731052627	
		■ ■ ■			
SPC 4x2G	1731052532	2	SPC 4x2B	1731052632	10
SPC 4x3G	1731052533	3	SPC 4x3B	1731052633	
SPC 4x4G	1731052534	4	SPC 4x4B	1731052634	
SPC 4x5G	1731052535	5	SPC 4x5B	1731052635	
SPC 4x6G	1731052536	6	SPC 4x6B	1731052636	

The SPC cable inserts are openable grommets which can be used into the OSF series for routing preterminated cables with diameters from 2 to 14 mm.

The 2X and 4X allow multiple cables to be routed into the same cable gland.

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0 (grey or black)

Temperature: -40°C... +110°C (static)

Features: halogens and silicones free

Related products

OSF
OSF 90



1