
AP

Strain relief modules – screw fixing



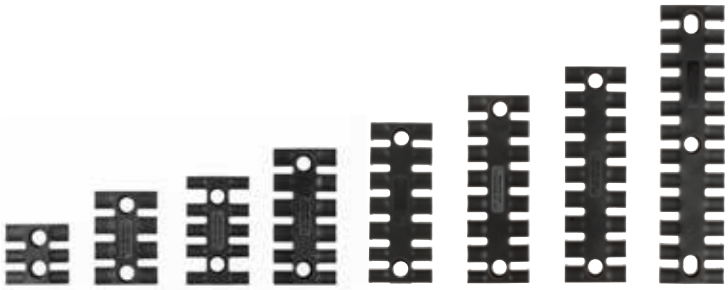

FEATURES

- Modules also availablle with aluminum or brass bushings
- Strain relief acc. to EN 62444
- Easy to install
- Cost-effective solution
- UL94-V0

The AP modules are used in electrical switchboards and equipment in order to keep the cables tidy whilst providing strain relief according to EN 62444.
The cables can be fixed with standard plastic ties or reusable velcro ties.
Spacers are available for multi-tier applications.

Material: PA66+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0
Temperature: -40°C... +140°C (static)


RELATED PRODUCTS

- DZ spacers (page 126)
- FV cable ties (page 131)
- EMC AP (pag. 164)

Modules without bushings

Model	Code	Dimensions (mm) L1	Dimensions (mm) L2	Teeth	Pcs (/pack)
AP 39	1733020003	38,5	19,5	3	10
AP 60	1733020004	59,5	43,5	4	
AP 70	1733020005	69,1	43,5	5	
AP 87	1733020006	86,5	68	6	
AP 103	1733020007	102,5	84	7	
AP 121	1733020008	121	102,5	8	
AP 140	1733020009	139,5	121	9	
AP 180	1733020010	180	157	12	

Dimensions (mm)

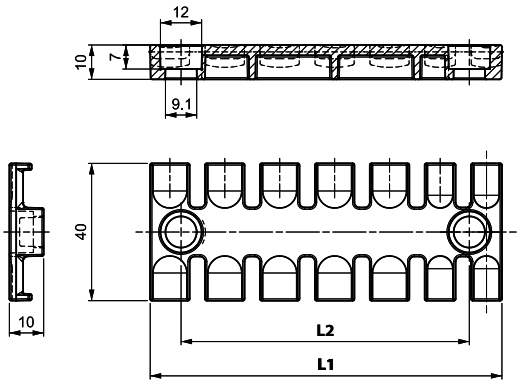


UL94-V0 · HL3 EN 45545-2 · UV ISO 4892-2A · RoHS COMPLIANT

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**





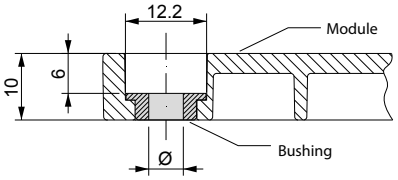

Modules with aluminum bushings

Modules with brass bushings

Model	Code	Bushing	Model	Code	Bushing	Dimensions (mm) L1	Dimensions (mm) L2	Teeth	Pcs (/pack)
AP 39 BA4	1733021403		AP 39 BR4	1733022403		38,5	19,5	3	
AP 60 BA4	1733021404		AP 60 BR4	1733022404		59,5	43,5	4	
AP 70 BA4	1733021405		AP 70 BR4	1733022405		69,1	43,5	5	
AP 87 BA4	1733021406		AP 87 BR4	1733022406		86,5	68	6	
AP 103 BA4	1733021407	Ø 4 mm	AP 103 BR4	1733022407	Ø 4 mm	102,5	84	7	
AP 121 BA4	1733021408		AP 121 BR4	1733022408		121	102,5	8	
AP 140 BA4	1733021409		AP 140 BR4	1733022409		139,5	121	9	
AP 180 BA4	1733021410		AP 180 BR4	1733022410		180	157	12	
AP 39 BA5	1733021503		AP 39 BR5	1733022503		38,5	19,5	3	
AP 60 BA5	1733021504		AP 60 BR5	1733022504		59,5	43,5	4	
AP 70 BA5	1733021505		AP 70 BR5	1733022505		69,1	43,5	5	
AP 87 BA5	1733021506		AP 87 BR5	1733022506		86,5	68	6	
AP 103 BA5	1733021507	Ø 5 mm	AP 103 BR5	1733022507	Ø 5 mm	102,5	84	7	10
AP 121 BA5	1733021508		AP 121 BR5	1733022508		121	102,5	8	
AP 140 BA5	1733021509		AP 140 BR5	1733022509		139,5	121	9	
AP 180 BA5	1733021510		AP 180 BR5	1733022510		180	157	12	
AP 39 BA6	1733021603		AP 39 BR6	1733022603		38,5	19,5	3	
AP 60 BA6	1733021604		AP 60 BR6	1733022604		59,5	43,5	4	
AP 70 BA6	1733021605		AP 70 BR6	1733022605		69,1	43,5	5	
AP 87 BA6	1733021606		AP 87 BR6	1733022606		86,5	68	6	
AP 103 BA6	1733021607	Ø 6 mm	AP 103 BR6	1733022607	Ø 6 mm	102,5	84	7	
AP 121 BA6	1733021608		AP 121 BR6	1733022608		121	102,5	8	
AP 140 BA6	1733021609		AP 140 BR6	1733022609		139,5	121	9	
AP 180 BA6	1733021610		AP 180 BR6	1733022610		180	157	12	

UL94-V0 HL3 EN 45545-2 UV ISO 4892-2A RoHS COMPLIANT

© Detas SpA – ISO9001/ ISO14001 certified company
Via Treponti, 29 – 25086 Rezzato BS – Italy – Tel. +39 030 2594120
info@detasultra.com – **www.detasultra.com**

AP-DP

Strain relief modules - double comb for screw fixing

FEATURES

- Strain relief acc. to EN 62444
- Easy to install
- Cost-effective solution
- UL94-V0

The AP-DP modules are used in electrical switchboards and equipment keeping cables of various sizes tidy whilst providing strain relief according to EN 62444.
The cables can be fixed with standard plastic ties or reusable Velcro ties.
Spacers are available for multi-tier applications.

Material: PA66+GF
Flammability: self-extinguishing acc. to UL94-V0
Temperature: -40°C... +140°C (static)
Features: halogen-free, silicone-free

RELATED PRODUCTS

- DZ spacers (page 126)
- FV cable ties (page 131)
- EMC AP (pag. 164)






Aluminum bushing



Brass bushing

Model	Code	Bushing	Dimensions (mm) L1	L2	Teeth	Pcs (/pack)
AP-DP 63	1733010047	-	63,4	42	4 - 7	10
AP-DP 95	1733010611	-	95	74,5	6 - 11	
AP-DP 119	1733010713	-	119	108	7 - 13	
AP-DP 63-BA	1733011447	**Ø 4 mm**	63,4	42	4 - 7	
AP-DP 95-BA4	1733011411		95	74,5	6 - 11	
AP-DP 119-BA4	1733011413		119	108	7 - 13	
AP-DP 63-BR4	1733012447	**Ø 4 mm**	63,4	42	4 - 7	
AP-DP 95-BR4	1733012411		95	74,5	6 - 11	
AP-DP 119-BR4	1733012413		119	108	7 - 13	

Dimensions (mm)

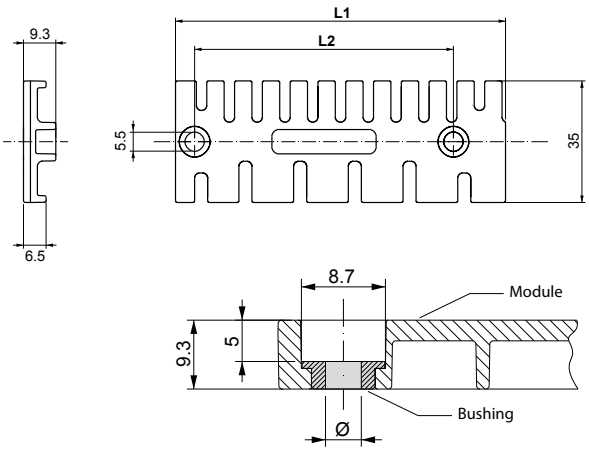

UL94-V0 · HL3 EN 45545-2 · UV ISO 4892-2A · RoHS COMPLIANT

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**