DES LC24

NEW

Splittable frame for cables with and without connectors

FEATURES

- For SPC and SPN grommets
- Stainless steel screws
- Strain relief according to EN 62444
- IP54
- Integrated UL94-V0 gasket
- Removable divider for small or large grommets in the same frame





The DES LC24 is a split cable entry frame designed for quick and flexible routing of cables with or without connectors.
It supports both small and large grommets of the SPC and SPN ranges, allowing multiple cable configurations.
The frame features a pre-assembled gasket for direct mounting onto the cabinet, and is secured using stainless steel screws.

Material: PP+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0 including gasket
Temperature: -40°C... +130°C (static)

RELATED PRODUCTS

- SPC grommets (from page 58)
- SPN grommets (from page 63)
- DES FLAP CLICK (page 38)
- HY360 hydraulic punch driver (page 179)

	Model	Code	Some possible configurations	Cut-out (mm)	Pcs (/pack)
NEW	DES LC24	1731010340		112 x 36	10
NEW	DES LC24/2	1731010342		112 x 36	

ON REQUEST

Mounting screws	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing


DES LC24



DES LC24/2



Dimensions (mm)

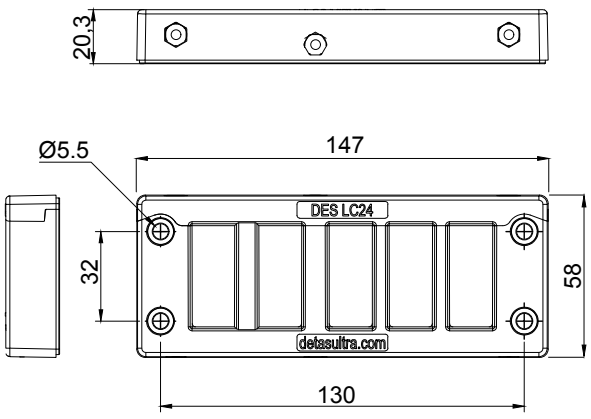

IP54 | NEMA 12 | HL3 EN 45545-2 | UL94-V0 | UV ISO 4892-2A | RoHS COMPLIANT | IK10

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**


DES LC16

NEW

Splittable frame for cables with and without connectors

FEATURES

- For SPC and SPN grommets
- Stainless steel screws
- Strain relief according to EN 62444
- IP54
- Integrated UL94-V0 gasket
- Removable divider for small or large grommets in the same frame


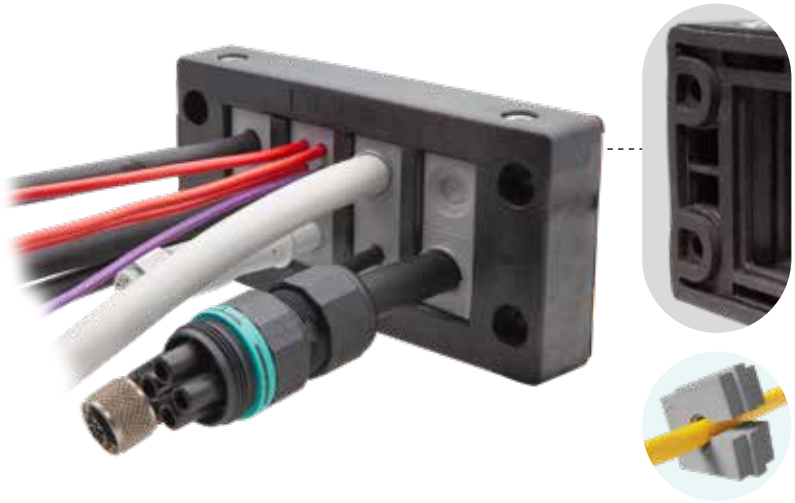


The DES LC16 is a split cable entry frame designed for quick and flexible routing of cables with or without connectors.
It supports both small and large grommets of the SPC and SPN ranges, allowing multiple cable configurations.
The frame features a pre-assembled gasket for direct mounting onto the cabinet, and is secured using stainless steel screws.

Material: PP+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0 including gasket
Temperature: -40°C... +130°C (static)

RELATED PRODUCTS

- SPC grommets (from page 58)
- SPN grommets (from page 63)
- HY360 hydraulic punch driver (page 179)

	Model	Code	Some possible configurations	Cut-out (mm)	Pcs (/pack)
NEW	DES LC16	1731010344		86 x 36	10
NEW	DES LC16/2	1731010346		86 x 36	10

ON REQUEST

Mounting screws	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing


DES LC16



DES LC16/2



Dimensions (mm)

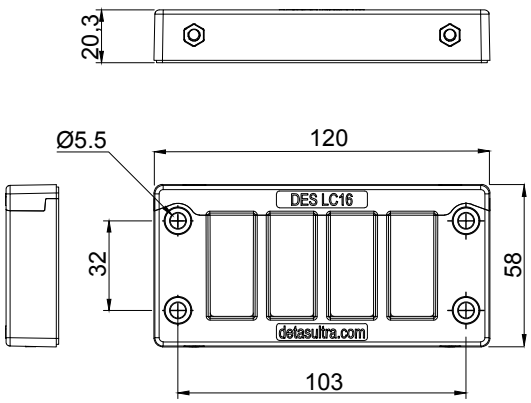

IP54 | NEMA 12 | HL3 EN 45545-2 | UL94-V0 | UV ISO 4892-2A | RoHS COMPLIANT | IK10

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**


DES LC10

NEW

Splittable frame for cables with and without connectors

FEATURES

- For SPC and SPN grommets
- Stainless steel screws
- Strain relief according to EN 62444
- IP54
- Integrated UL94-V0 gasket
- Removable divider for small or large grommets in the same frame

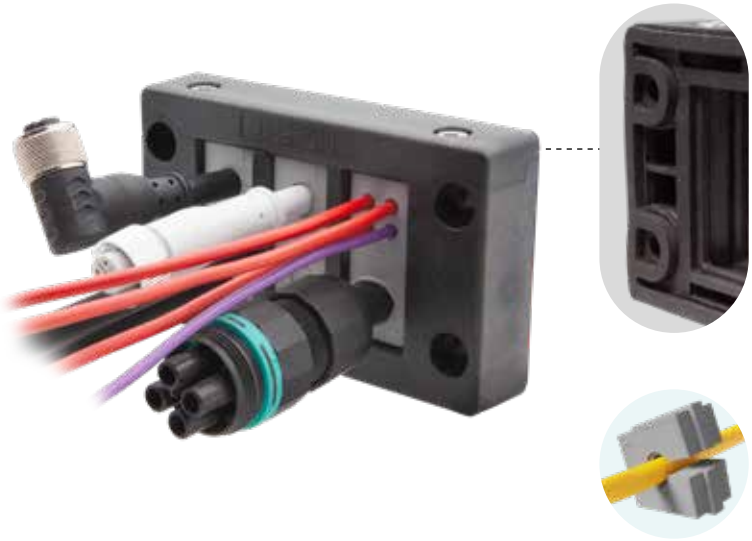


The DES LC10 is a split cable entry frame designed for quick and flexible routing of cables with or without connectors.
It supports both small and large grommets of the SPC and SPN ranges, allowing multiple cable configurations.
The frame features a pre-assembled gasket for direct mounting onto the cabinet, and is secured using stainless steel screws.

Material: PP+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0 including gasket
Temperature: -40°C... +130°C (static)

RELATED PRODUCTS

- SPC grommets (from page 58)
- SPN grommets (from page 63)
- HY360 hydraulic punch driver (page 179)

Model	Code	Some possible configurations	Cut-out (mm)	Pcs (/pack)
NEW DES LC10	1731010348		65 x 36	10


ON REQUEST

Mounting screws	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing





Dimensions (mm)

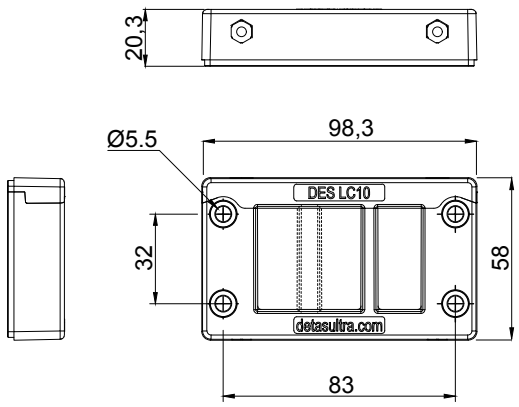

IP54 | NEMA 12 | HL3 EN 45545-2 | UL94-V0 | UV ISO 4892-2A | RoHS COMPLIANT | IK10

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**


DES LCQ

NEW

Splittable frame for cables with and without connectors

FEATURES

- For SPC and SPN grommets
- Stainless steel screws
- Strain relief according to EN 62444
- IP54
- Integrated UL94-V0 gasket
- Removable divider for small or large grommets in the same frame

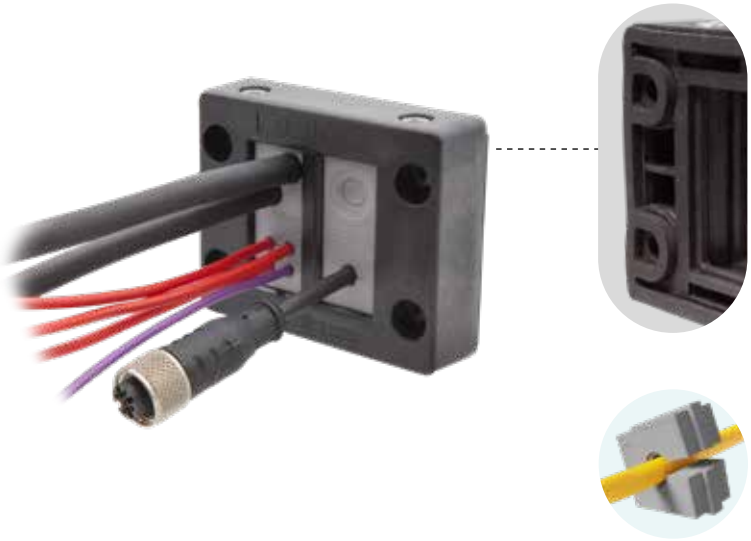


The DES LCQ is a split cable entry frame designed for quick and flexible routing of cables with or without connectors.
It supports both small and large grommets of the SPC and SPN ranges, allowing multiple cable configurations.
The frame features a pre-assembled gasket for direct mounting onto the cabinet, and is secured using stainless steel screws.

Material: PP+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0 including gasket
Temperature: -40°C... +130°C (static)

RELATED PRODUCTS


- SPC grommets (from page 58)
- SPN grommets (from page 63)
- HY360 hydraulic punch driver (page 179)

Model	Code	Some possible configurations	Cut-out (mm)	Pcs (/pack)
NEW DES LCQ	1731010350		40 x 36	10

ON REQUEST

Mounting screws	1731991020	Set of 4 mounting screws in AISI304 with Black Geomet finishing

Dimensions (mm)

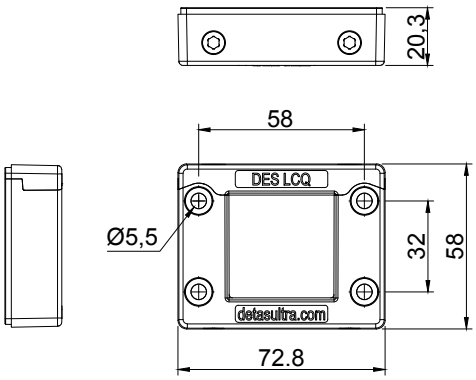





IP54 NEMA 12 HL3 EN 45545-2 UL94-V0 UV ISO 4892-2A RoHS COMPLIANT IK10

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**

DES LC2 / LC3 / LC4 / LC5

Splittable frame for cables with and without connectors

FEATURES

- For SPC grommets
- Stainless steel screws
- Strain relief according to EN 62444
- IP54
- Integrated UL94-V0 gasket

The DES LC2, LC3, LC4 and LC5 splittable frames family are compatible with single, double and quadruple SPC grommets and they can accommodate up to 20 cables with or without connectors with diameters from 1 to 15 mm. The frame is firmly closed with screws while the nuts are overmolded. There's no need to install a separate gasket.

Material: PC+GF, halogen-free, silicone-free
Flammability: self-extinguishing acc. to UL94-V0 including gasket
Temperature: -40°C... +130°C (static)

RELATED PRODUCTS

- SPC grommets (from page 58)






Model	Code	Some possible configurations	L1 (mm)	L2 (mm)	Cut-out (mm)	Pcs (/pack)
DES LC5	1731010335		147	130	110 x 20	10
DES LC4	1731010334		120	103	83 x 20	
DES LC3	1731010333		98,3	83	62 x 20	
DES LC2	1731010332		72,8	58,25	40 x 20	

Model (upon request)	Code	Description
Mounting screws	1731991010	Set of 2 mounting screws in AISI304 with Black Geomet finishing

Dimensions (mm)

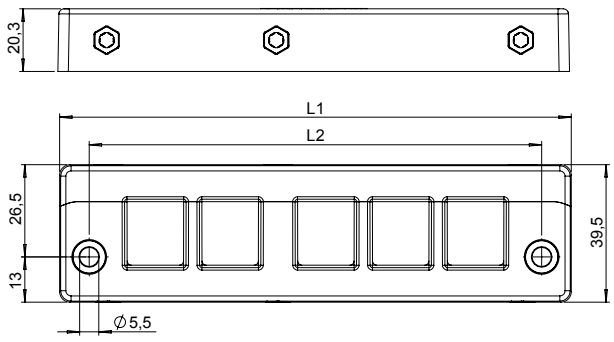

IP54 NEMA 12 UL94-V0 UV ISO 4892-2A RoHS COMPLIANT IK10

© Detas SpA - ISO9001/ ISO14001 certified company
Via Treponti, 29 - 25086 Rezzato BS - Italy - Tel. +39 030 2594120
info@detasultra.com - **www.detasultra.com**