


Model	Code	Cable nr. - Ø cables [mm]	Dimensions [mm]		Pcs /pack
			Ø A- cut-out	Ø P- diameter	
DES-PMU 16G	1732060116	1 - max. 10	16,5	24	10
DES-PMU 20G	1732060120	1 - max. 13	20,5	29	
DES-PMU 25G	1732060125	1 - max. 15	25,4	34	
DES-PMU 32G	1732260132	1 - max. 22	32,5	40	
DES-PMU 16B	1732061116	1 - max. 10	16,5	24	
DES-PMU 20B	1732061120	1 - max. 13	20,5	29	
DES-PMU 25B	1732061125	1 - max. 15	25,4	34	
DES-PMU 32B	1732261132	1 - max. 22	32,5	40	

Round cable entry plates with double membrane for single cable

- ▶ Metric sized
- ▶ Quick to install
- ▶ Cost efficient solution
- ▶ High IP grade (IP66-67)
- ▶ Reduced thickness

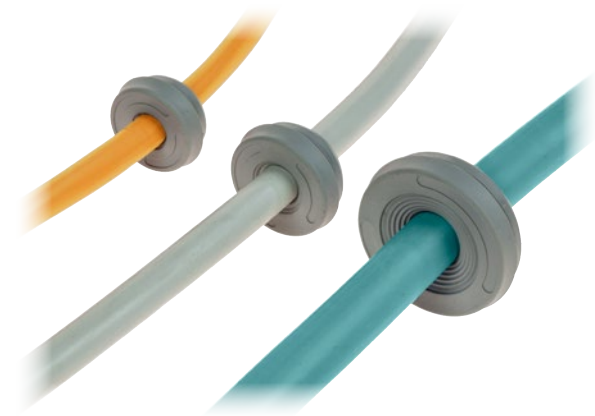

Double membrane



The round metric DES-PMU is a single cable alternative to standard cable glands on electrical, electronic and telecommunication cabinets and equipment.

The cable is pushed through the front membrane, whilst the second membrane increases the strain relief and liquid resistance.

2

Technical data

Material: TPE

Flammability: self-extinguishing acc. to UL94-V0

Temperature: -40°C... +105°C (static)

Features: halogens and silicones free

Wall thickness: from 1.5 to 2.5 mm

Related products

Hydraulic punch driver HY360

Dimensions [mm]

